


# TPWX3GD "HAZARDOUS ZONE" SERIES ATEX PALLET TRUCK SCALE



TPWX3GD

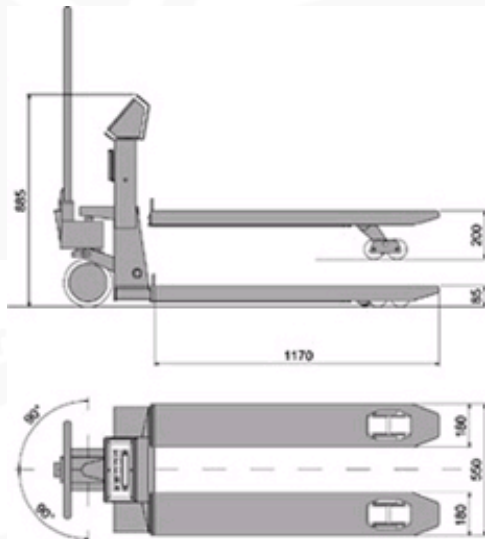

Dimensions in mm

Pallet truck scales, with built-in electronic weighing, suitable for harsh working conditions and dangerous areas classified as hazardous (ZONE 2, 22) in accordance with Ex II 3GD IIC T6 T130°C X protection. The ATEX certified four load cell weight detection guarantees the best accuracy in all work conditions. Available also CE-M APPROVED.

## MAIN FEATURES

- Maximum lifting capacity: 2000Kg.
- Accuracy: +/- 0.1% of the capacity.
- Fork dimensions 1170 x 550 x 85 mm.
- Weighs about 120 kg.
- Bearing oven-fire painted structure in extra thick sheet steel.
- **Standard fitted swivelling column head.**
- Steering wheels and double loading rollers with a poliurethane coating.
- ATEX certified, **4 stainless steel IP68 shear-beam load cells.**
- Indicator with easy to clean **satined stainless steel case with IP68** enclosure built to withstand humid and dusty environments; large LCD display 25-mm high contrast digits which are clearly visible even in poor lighting conditions; 16-key numerical/functional membrane waterproof keyboard.
- Calibration and Set-Up parameters configurable from keyboard or PC.
- Power supply through extractable battery, rechargeable in safe zone.
- 40-hour approximate operating time.
- Programmable automatic switch-off.
- Battery level indication.
- Equipped with 230Vac 50 Hz battery charger to be recharged in a safe area.

## SELECTABLE FUNCTIONS

- **High Resolution Weighing x 10**
- **Net/Gross or lb/kg conversion**
- **Accumulation**
- **Formula weighing**
- **+/- Checkweighing**
- **Percentage weighing**
- **Counting** (Max. resolution of 1.500.000 divisions)
- **In/Out Truck weighing**
- **Hold and Peak**
- **Peer-to-peer** (up to 4 remote connectable indicators)
- **Set Point Control** (with optional interface)

## KEYBOARD FUNCTIONS

- Zeroing, Automatic tare, Presetable tare, Print and/or data transmission command, Function command.

## OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Alibi memory with time-date.
- Time-Date.
- Parking brake system with command pedal mounted on steering wheels.
- Set of steering wheels in Vulkolan (nonstainable).
- 680 mm fork width (ask for price estimate).
- Special fork length from 850 to 1500 mm (ask for price estimate).
- 3000 kg capacity (ask for price estimate).
- Special models and sizes (ask for estimate).
- Special wheels available with price estimate.

## Versions available

Code	Max Capacity kg	Division kg	CE-M Division kg
TPWX3GD	500 / 1000 / 2000	0,2 / 0,5 / 1	

**Options only available at time of order**

<b>Code</b>	<b>Description</b>
TPWXFI	Pair of stainless steel forks.
TPWBKB3GD	Kit with additional extractable rechargeable battery pack, for using the scale in a hazardous area 24/7. NOTE: substitution of the battery pack allowed only in a safe area.
DFCLK	Real Time Clock (Time/date)
ALMEM	Alibi memory (fiscal memory) with time/date; max. 120.000 weighs
RTV2	Set of steering wheels in Vulkolan (nonstainable)
TPWFRE	Parking brake system with command pedal mounted on steering wheels

**Accessories**

<b>Code</b>	<b>Description</b>
UKPLUG	Power adapter from Schuko to BS1363.
TECMAN	Printed technical manual (free, if downloaded from the web) NET PRICE
UMAN	Printed user manual (free, if downloaded from the web) NET PRICE